WIND LOSS MITIGATION INFORMATION

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

This Mitigation Inspection Form must be completed to capture mitigation features applicable to a Type II (4 to 6 story) or Type III (7 or more story) building. This Inspection Form is required for either residential condominium unit owners or commercial residential applicants requesting mitigation credits in such buildings.

PREMISES #:		SUBJECT OF INSURANCE: The Lands of the President Condo 8A Association OLICY #:				
BUILDING #:	3050	STREET ADDRESS: 3050 Presidential Way West Palm Beach, FL 33401				
# STORIES:	4	BLDG DESCRIPTION: 3050 Presidential Way				
BUILDING T	YPE:	X II (4 to 6 stories) ☐ III (7 or more stories)				
Terrain Exp	osure (Category must be provided for each insured location.				
		ne building or unit at the address indicated above TERRAIN EXPOSURE CATEGORY as defined under the is (Check One): Exposure C or X Exposure B				
Certification b	elow for	or purposes of TERRAIN EXPOSURE CATEGORY above does not require personal inspection of the				
premises.						
Certification Built On or Afte		nd Speed is required to establish the basic wind speed of the location (Complete for Terrain B only if Year , 2002).				
		at the basic WIND SPEED of the building or unit at the address indicated above based upon county wind or the Florida Building Code (FBC) is (Check One): ☐ ≥100 or ☐ ≥110 or ☑ ≥120				
		ind Design is required when the buildings is constructed in a manner to exceed the basic wind speed the structure location (Complete for Terrain B only if Year Built On or After Jan.1, 2002).				
		the building or unit at the address indicated above is designed and mitigated to the Florida Building Code N of (Check One): ☐ ≥100 or ☐ ≥110 or ☒ ≥120				
Certification for the purpose of establishing the basic WIND SPEED or WIND SPEED DESIGN above does not require personal inspection of the premises.						
NOTE: Any docu	ımentat orm. At	igation device(s) installed: tion used in validating the compliance or existence of each construction or mitigation attribute must t least one photo documenting the existence of each visible and accessible construction or mitigation ons 1 through 4 must accompany this form.				
		overings				
Roof Covering	Materia	Tar & Gravel (Flat), Concrete Tile Date of Installation: 2004 (04071161, 7/27/2004), 2004 (0407116 , 7.27/2004)	'/27/2004			
	Leve	rel A (Non FBC Equivalent) – Type II or III or more roof coverings that do not meet the FBC Equivalent definition requirements below.				
[>	₹ Lev	rel B (FBC Equivalent) – Type II or III				

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

Single-Ply, Modified Bitumen, Sprayed Polyurethane foam, Metal, Tile, Built-up, Asphalt Shingle or Rolled Roofing, or other roof covering membranes/products that at a minimum meet the 2001 or later Florida Building Code or the 1994 South Florida Building Code and have a Miami-Dade NOA or FBC 2001 Product Approval listing that is/was current

All mechanical equipment must be adequately tied to the roof deck to resist overturning and sliding during high winds. Any flat roof covering with flashing or coping must be mechanically attached to the structure with face fasteners (no clip/cleat systems), and asphalt roof coverings on flat roofs must be 10 years old or less.

at the time of installation.

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

2.	Roof Deck Attachment					
	Level A – Wood or Other Deck Type II only					
	Roof deck composed of sheets of structural panels (plywood or OSB). Or					
	Architectural (non-structural) metal panels that require a solid decking to support weight and loads. Or					
	Other roof decks that do not meet Levels B or C below.					
	☐ Level B – Metal Deck Type II or III					
	Metal roof deck made of structural panels fastened to open-web steel bar joists and integrally attached to the wall.					
	A roof structure composed of cast-in-place or pre-cast structural concrete designed to be self-supporting and integrally attached to wall/support system.					
3.	Secondary Water Resistance N/A					
	Underlayment A self-adhering polymer modified bitumen roofing underlayment (min rubber sheets with peel and stick underside located beneath the roof covering and normal felt underlayment) with a minimum width of 6" meeting the requirements of ASTM D 1970 installed over all playered OSB joints to protect from water intrusion. All secondary water resistance products must be installed partitle manufacturer's recommendations. Roofing felt or similar paper based products are not acceptable for secondary water resistance.					
	Foamed Adhesive					
	A foamed polyurethane sheathing adhesive applied over all joints in the roof sheathing to protect interior from water intrusion.					
4.	Opening Protection N/A					
	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of:					
	□SSTD12;					
	☐ASTM E 1886 and ASTM E 1996;					
	☐Miami-Dade PA 201, 202, and 203;					
	☐Florida Building Code TAS 201, 202 and 203.					
	All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.					
	Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of:					
	☐ASTM E 1886 and ASTM E 1996					
	All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.					

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

CERTIFICATION

i certify that I hold an	active license as a: (CHECK O	NE OF THE FOLLOWING)				
☑ General or building contractor licensed under Section 489.111, Florida Statutes.							
☐ Building code ins	pector certified under Section 4	68.607, Florida Statutes.					
☐ Professional archi	tect licensed under Section 481	1.213, Florida Statutes.					
☐ Professional engir	neer licensed under Section 471	1.015, Florida Statutes.					
I also certify that I personally inspected the premises at the Location Address listed above on the inspection date provided on this Mitigation Inspection Form. In my professional opinion, based on my knowledge, information and belief, I certify that the above statements are true and correct.							
structural or physical char to receive a property instruction other purpose. The under nothing in this Form shal	n Form and the information set forth racteristics exist at the Location Addresurance premium discount on insurant rsigned does not make a health or solution to the undersure to the named insured or to are	ess listed above and for the pu ce provided by Citizens Prop safety certification or warranty lersigned or on any entity to	rpose of permi erty Insurance r, express or ir	tting the Named Insured Corporation and for no mplied, of any kind, and			
Name of Company:	Brad Davis for Don Meyler Inspection	ons	_ Phone:	(954) 749-7099			
Name of Company: Name of Inspector	Brad Davis for Don Meyler Inspection	ons License Type General	Phone: License #	(954) 749-7099 CGC1505649			
	•	_	_	***************************************			
Name of Inspector	Brad Davis	_	_	***************************************			

^{*}Applicant /Insured's signature must be from the Board President and another member of the board for condo and homeowner's associations or an officer of the named insured for all other business entities.

[&]quot;Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony of the third degree."

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.









Front Elevation



Back Elevation



Left Elevation

Right Elevation











Address Number



Concrete/Clay Tile Roof Covering

Concrete

















Unprotected Window

Unverified Impact Window





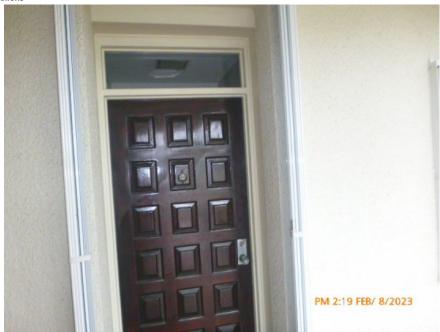





Unverified Panel Shutters



Solid Door



Impact Accordion Label







Unverified Accordion Shutter