Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspec	tion Date	: 02/18/2023								
Owner	r Informa	ntion								
Owner	Contact Person:									
Addre		8034 Aberdeen Dr			Home Phone:					
City:		Boynton Beach	Zip: 33472		Work Phone:					
Count	v:	Palm Beach County								
	nce Comp	·	1		Policy #:					
		1997	# of Stories: 2	Email:						
			<u> </u>	o an anistanae of as sho		attuibuta must				
accom	pany this		graph must accompa	ny this form to validat	onstruction or mitigation a e each attribute marked in (s) verified on this form.					
		de: Was the structure built e HVHZ (Miami-Dade or E			de (FBC 2001 or later) OR fode (SFBC-94)?	for homes				
	A. Built in compliance with the FBC: Year Built For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY)//									
✓	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built <u>1997</u> . For homes built in 1994, 1995, and 1996 provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//									
		nown or does not meet the		ver "A" or "B"						
	of Coveri	ings: Select all roof covering	ng types in use. Provi	de the permit applicatio	n date OR FBC/MDC Prod on was available to verify o					
		vering identified.	ii/Replacement OK ii	idicate that no informati	on was available to verify v	compitance for				
		Covering Type	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance				
	1 Asn	halt/Fiberglass Shingle	//			П				
	_	crete/Clay Tile	06/30/2022	Permit #: B-2022-025201-0000	2022					
	3. Met	al	//							
	4. Buil	t Up	/							
	5. Mer	nbrane	/							
	✓ 6. Oth	er Modified Bitumen	03/27/1998	Permit #: B-1996-024112-0001	1998					
					oduct Approval listing curre e roof is original and built i					
✓	installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.									
	C. One o	or more roof coverings do 1	not meet the requiren	nents of Answer "A" or "	В".					
	D. No ro	of coverings meet the requ	irements of Answer '	'A" or "B".						
2 Po.	of Dools A	attachment: What is the we	alvast form of roof do	ook attaahmant?						
3. <u>Ku</u>					/ Q (1:	£2.4?				
	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.									
	B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.									
✓	C. Plywer maximu lumber/	ood/OSB roof sheathing w m of 24"inches o.c.) by 8d Tongue & Groove decking	ith a minimum thick common nails space with a minimum of 2	ness of 7/16"inch attach ed a maximum of 6" inch 2 nails per board (or 1 na	ed to the roof truss/rafter (speed in the fieldOR- Dimental per board if each board in deck fastening system or true	paced a sional s equal to or				
Inspe	ectors Init	ials NG Pr	operty Address	8034 Aberdeen Dr, Boy	rnton Beach, FL 33472					
*This	s verificati				have been made to the stru	ucture or				

		in the field	n the field or has a mean uplift resistance of at least 182 psf.											
		D. Reinfor	D. Reinforced Concrete Roof Deck.											
		E. Other:	E. Other:											
		F. Unknow	F. Unknown or unidentified.											
		G. No attic	access											
4. Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Dowithin 5 feet of the inside or outside corner of the roof in determination of WEA										tachmen	t of hip/v	valley jac	eks	
		A. Toe Nai	ils											
					er anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to ate of the wall, or									
☐ Metal connectors that do not meet the minimal conditions or requirements of B, C, or										3, C, or D)			
	Mi	inimal cond	ditions	to qualify	<u>for categorie</u>	es B, C, or D.	. All visibl	e metal co	onnecto	rs are:				
		\checkmark	Secur	ed to truss/rafter with a minimum of three (3) nails, and										
		~		the blockii	wall top plate ng or truss/raf									
		□ B. Clips												
			Metal	l connecto:	rs that do not	wrap over th	ne top of th	e truss/ra	fter, or					
		☐ Metal connectors with a minimum of 1 str nail position requirements of C or D, but i						rap that wraps over the top of the truss/rafter and does not meet the						the
	\checkmark	C. Single V	Wraps											
	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.									n a				
		D. Double	Wraps											
			beam	, on either	ors consisting side of the tru nails on the	uss/rafter who	ere each st	rap wraps	over the	top of th	e truss/ra	after and		
			Metal	l connecto:	rs consisting	of a single st	trap that w	raps over	the top o	of the trus	s/rafter,		d to the v	vall on
		E. Structur	Structural Anchor bolts structurally connected or reinforced concrete roof.											
		F. Other							-					
		G. Unknown or unidentified												
		H. No attic	access											
5.	Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fas wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).									or				
		A. Hip Ro	oof		with no othe									
		B. Flat Ro	oof	Roof on	a building we of less that	ith 5 or mor	re units wl	nere at lea	ast 90%	of the m	ain roof	f area ha	s a	
	~	C. Other F	Roof		that does not	qualify as ei	ither (A) or	(B) abov	e.					
6.	Sec	ondary Wa	iter Res	sistance (S	WR): (standa	rd underlayr	nents or ho	ot-mopped	d felts do	not qual	lify as an	SWR)		
		to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss.												
	✓	C. Unkno		ındetermin	ed									
	•	C. UIIKIIO	wii Oi U	muctelliill	cu.									
I	nspe	ctors Initials			Property		8034 A					72		


spacing that is shown to have an equivalent or greater resistance than 8d common nails spaced a maximum of 6 inches

This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable. Non-Glazed **Glazed Openings Opening Protection Level Chart** Openings Place an "X" in each row to identify all forms of protection in use for each Windows opening type. Check only one answer below (A thru X), based on the weakest Entry Garage Glass Garage Skylights or Entry form of protection (lowest row) for any of the Glazed openings and indicate the Block Doors Doors Doors Doors weakest form of protection (lowest row) for Non-Glazed openings. Not Applicable- there are no openings of this type on the structure Χ Χ Χ A Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights) Χ В Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights) C Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007 Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, D ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance Opening Protection products that appear to be A or B but are not verified N Other protective coverings that cannot be identified as A, B, or C X No Windborne Debris Protection Χ Χ A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above). • Miami-Dade County PA 201, 202, and 203 • Florida Building Code Testing Application Standard (TAS) 201, 202, and 203 • American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996 • Southern Standards Technical Document (SSTD) 12 • For Skylights Only: ASTM E 1886 and ASTM E 1996 For Garage Doors Only: ANSI/DASMA 115 ☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above exist B. Exterior Opening Protection-Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above): • ASTM E 1886 and ASTM E 1996 (Large Missile - 4.5 lb.) • SSTD 12 (Large Missile - 4 lb. to 8 lb.) • For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.) ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above □ C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above). ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above Inspectors Initials NG Property Address 8034 Aberdeen Dr, Boynton Beach, FL 33472

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

with pro	tective co	verings not		ements of Answe	er "A", "l	B", or C" o	on) All Glazed openings are por systems that appear to meet				
	□ N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist										
			azed openings class he table above	sified as Level D	in the ta	able above	e, and no Non-Glazed opening	3S			
			azed openings is cl	assified as Level	X in the	e table abo	ve				
							evel X in the table above.				
MI	TICATI	ON INCD	DECTIONS MIS	T DE CEDTI	EIFD 1	DV A OU	ALIFIED INSPECTOR.				
						_	ALIFIED INSPECTOR. Is who may sign this form	n			
Qualified Inspector N		11(2), 110		ense Type:	ng or n	- Tany Tana	License or Certificate #:				
Noslandy Gor]	Home Inspector		I m	Hi12494				
Inspection Company: South Florida		1				Phone: 786-21	8-2844				
Qualified In	<u>spector -</u>	I hold a	n active license a	<u>is a: (</u> check o	ne)						
			ection 468.8314, Florication Industry Licensin				ory number of hours of hurricane y exam.	mitigation			
-	-		inder Section 468.607								
	, , ,										
	_		der Section 471.015, F								
			ler Section 481.213, F			, avalifiantia	na ta proporte aspelata a uniform	a mitication			
			on 627.711(2), Florid		necessary	quamicano	ns to properly complete a uniforn	1 miugauon			
knowledge, and I, Noslandy G (print na and profession be responsible Qualified Insponsible An individual form is subject the appropriat Inspector who inspector perse	d experient conzalez a ame) al engined for his/he ector Sign or entity we to investive licensing certifies the	ers only) I I r work. ature: yho knowir gation by t gagency o his formed the	net a mitigation version fied inspector and had my employee (Nostandy Gonzalez Ingly or through greathe Florida Division or to criminal prosection.	rification inspe I personally per Noslandy Gon (print name Doss negligence por Insurance Icution. (Section le for the misco	ction. formed zalez) of insperate: rovides raud an 627.711	the inspector perform to the dector) 02/18/ a false or and may be 1(4)-(7), Flatent femployees	fraudulent mitigation verifi subject to administrative ac lorida Statutes) The Qualifie es as if the authorized mitiga	cation tion by d tion			
							yee did perform an inspection Authorized Representative.	orthe			
Signature:				Date:0	2/18/20	23	_				
obtain or recei	ive a disco	unt on an i		to which the in	dividua		on verification form with the is not entitled commits a	e intent to			
The definition feature as offe				ses only and car	not be u	used to cer	tify any product or construc	tion			
Inspectors Ini	tials	NG	Property Addres	80 34 A	berdeen]	Dr, Boynto	n Beach, FL 33472				
*This verification			up to five (5) year	s provided no m	aterial c	hanges hav	ve been made to the structure	e or			

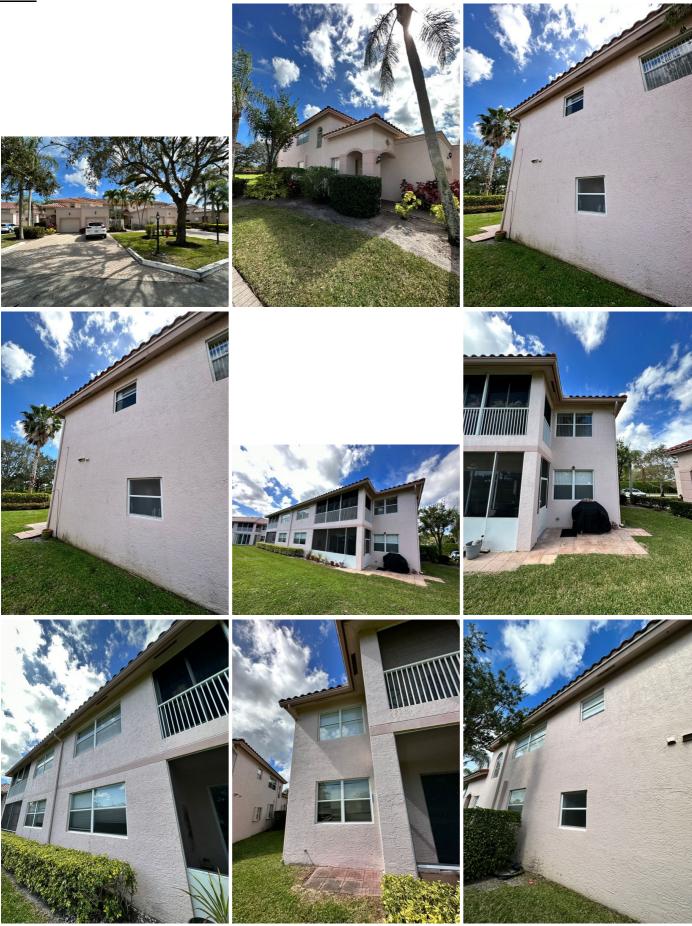


Inspectors Initials NG Property Address 8034 Aberdeen Dr, Boynton Beach, FL 33472

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.



Inspectors Initials NG Property Address 8034 Aberdeen Dr, Boynton Beach, FL 33472

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

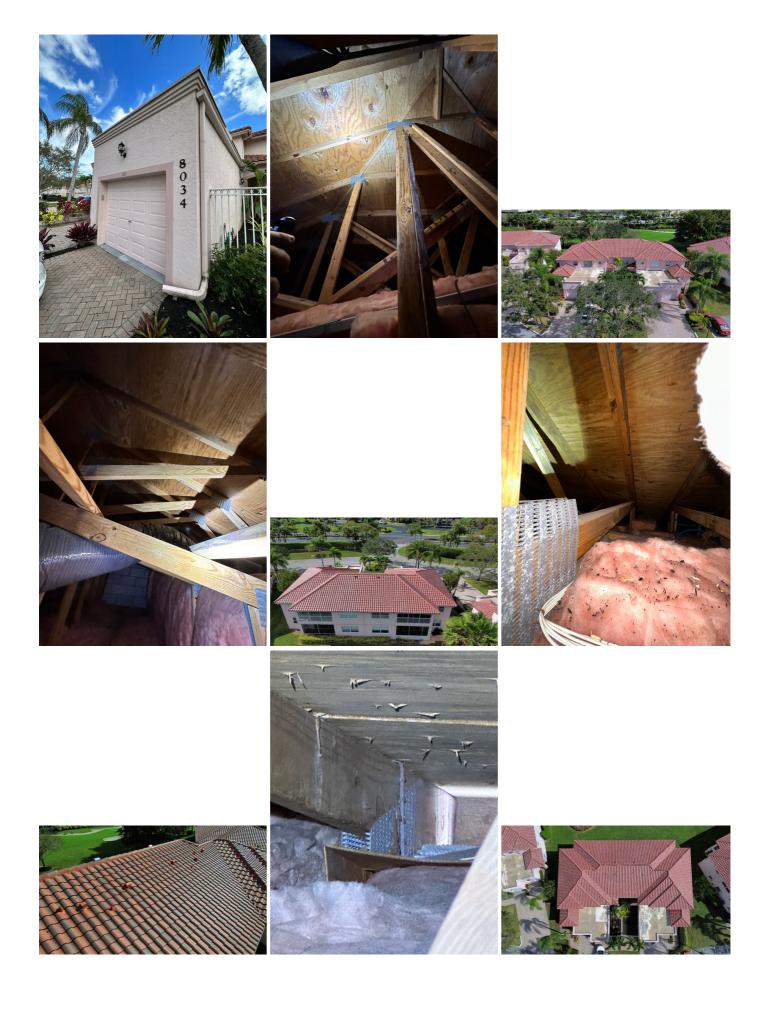

Inspectors Initials NG Property Address 8034 Aberdeen Dr, Boynton Beach, FL 33472

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.



Additional Information