Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 02/18/2023

	er Information		-					
	er Name: Canterbury at Aberdeen (Condo Assoc.	Contact Person:					
Addre			Home Phone:					
City:	Boynton Beach	Zip: 33472		Work Phone:				
Coun	ty: Palm Beach County			Cell Phone:				
Insura	ance Company:			Policy #:				
Year o	of Home: 1997	# of Stories: 2		Email:				
accon	E: Any documentation used in vali npany this form. At least one photo th 7. The insurer may ask addition	ograph must accomp	any this form to validate	e each attribute marked in				
	uilding Code: Was the structure buil cated in the HVHZ (Miami-Dade or				or homes			
	A. Built in compliance with the F with a date after 3/1/2002: Build:				it application			
\checkmark	C. Unknown or does not meet the	e requirements of Ans	wer "A" or "B"					
nu	pof Coverings: Select all roof cover imber OR Year of Original Installation ch roof covering identified.				ompliance for			
	2.1 Roof Covering Type	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance			
	1. Asphalt/Fiberglass Shingle	//						
	2. Concrete/Clay Tile	06/30/2022	Permit #: B-2022-025204-0000	2022				
	3. Metal	//						
	4. Built Up	//						
	5. Membrane	//						
	6. Other Modified Bitumen	12/17/1998	Permit #: B-1996-031096-0001	1998				
	A. All roof coverings listed above installation OR have a roofing pe							
✓	B. All roof coverings have a Miar roofing permit application after 9							
	C. One or more roof coverings do	not meet the requirer	ments of Answer "A" or "	В".				
	D. No roof coverings meet the rec	quirements of Answer	"A" or "B".					
3. <u>Ro</u>	oof Deck Attachment: What is the w	veakest form of roof d	eck attachment?					
	A. Plywood/Oriented strand boar inches o.c.) by staples or 6d nails wood shakes or wood shinglesC spacing that has an equivalent me	spaced at 6" along th DR- Any system of sci	ne edge and 12" in the fie rews, nails, adhesives, oth	ldOR- Batten decking sup ter deck fastening system or	porting			
	B. Plywood/OSB roof sheathing waximum of 24"inches o.c.) by 8 screws, nails, adhesives, other degreater resistance 8d nails spaced	with a minimum thick d common nails spac ck fastening system o	tness of 7/16"inch attached a maximum of 12" inc r truss/rafter spacing that	ed to the roof truss/rafter (sp hes in the fieldOR- Any sy is shown to have an equival	estem of lent or			
✓	C. Plywood/OSB roof sheathing waximum of 24"inches o.c.) by 8 lumber/Tongue & Groove deckin less than 6 inches in width)OR-	with a minimum thick d common nails spac g with a minimum of	tness of 7/16"inch attached a maximum of 6" inch 2 nails per board (or 1 na	ed to the roof truss/rafter (sp es in the fieldOR- Dimens iil per board if each board is	aced a sional equal to or			
Insp	ectors Initials NG P	roperty Address	8042 Aberdeen Dr, Boy	nton Beach, FL 33472	_			
*Thi	is verification form is valid for up t curacies found on the form.	to five (5) years provi	ded no material changes	have been made to the stru	cture or			
mac	curacies found on the form.			Dana 1 -f	0			

		in the field	d or has a n	nean uplift	resistance of	at least 18	32 psf.						
		D. Reinforced Concrete Roof Deck.											
		E. Other:	E. Other:										
		F. Unknow	Unknown or unidentified.										
		G. No attic	access.										
4.					the <u>WEAKES</u> e corner of the						hment o	fhip/valle	ey jacks
		A. Toe Nai	ils										
				ter anchor late of the	ed to top plate wall, or	e of wall u	sing nails d	riven at a	in angle t	hrough th	e truss/r	after and a	attached to
			Metal co	nnectors t	hat do not me	et the min	imal condit	ions or re	quiremen	its of B, C	c, or D		
	Mi	nimal cond	litions to q	<u>ualify for</u>	categories B.	<u>, C, or D. A</u>	All visible r	netal con	nectors a	re:			
		\checkmark	Secured	to truss/raf	ter with a min	imum of t	hree (3) nai	ls, and					
		~		blocking	ll top plate of or truss/rafter a								
		B. Clips											
			Metal co	nnectors t	hat do not wra	p over the	e top of the	truss/rafte	er, or				
										neet the			
	\checkmark	C. Single V	Wraps										
					onsisting of a son the front s							l is secured	l with a
		D. Double	Wraps										
			beam, on	either sid	consisting of 2 e of the truss/r ils on the from	after wher	re each strap	wraps ov	ver the to	p of the ti	uss/rafte		
			Metal co	nnectors c	onsisting of a ecured to the t	single stra	ap that wrap	s over th	e top of t	he truss/ra	after, is s	secured to	the wall on
		E. Structur	ral Anchor	bolts struc	turally conne	cted or rei	nforced cor	ncrete roo	of.				
		F. Other											
		G. Unknov	wn or unide	entified									
		H. No attic	access										
5.	wal				ape? (Do not closed space in								iscia or
		A. Hip Ro			th no other ro								t
		B. Flat Ro	ro		uilding with a f less than 2: sq ft								f
	~	C. Other R			t does not qua	lify as eit	her (A) or (I	3) above.					
6.	Sec	ondary Wa	ter Resist	ance (SWI	R): (standard u	nderlaym	ents or hot-	mopped f	felts do no	ot qualify	as an S	WR)	
		to the s	sheathing ong from wa	or foam ad	pof Deck) Self hesive SWR b on in the even	arrier (not	foamed-on	insulatio					
	✓	C. Unkno		etermined									
	~	C. UIIKIIO	wii oi uiid	ciciiiiiiieu.									
I	nspe	ctors Initials			Property Add		8042 Abe						

spacing that is shown to have an equivalent or greater resistance than 8d common nails spaced a maximum of 6 inches

This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable. Non-Glazed **Glazed Openings Opening Protection Level Chart** Openings Place an "X" in each row to identify all forms of protection in use for each Windows opening type. Check only one answer below (A thru X), based on the weakest Entry Garage Glass Garage Skylights or Entry form of protection (lowest row) for any of the Glazed openings and indicate the Block Doors Doors Doors Doors weakest form of protection (lowest row) for Non-Glazed openings. Not Applicable- there are no openings of this type on the structure Χ Χ Χ A Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights) Χ В Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights) C Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007 Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, D ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance Opening Protection products that appear to be A or B but are not verified N Other protective coverings that cannot be identified as A, B, or C X No Windborne Debris Protection Χ Χ A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above). • Miami-Dade County PA 201, 202, and 203 • Florida Building Code Testing Application Standard (TAS) 201, 202, and 203 • American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996 • Southern Standards Technical Document (SSTD) 12 • For Skylights Only: ASTM E 1886 and ASTM E 1996 For Garage Doors Only: ANSI/DASMA 115 ☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above exist B. Exterior Opening Protection-Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above): • ASTM E 1886 and ASTM E 1996 (Large Missile - 4.5 lb.) • SSTD 12 (Large Missile - 4 lb. to 8 lb.) • For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.) ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above □ C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above). ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above Inspectors Initials NG Property Address 8042 Aberdeen Dr, Boynton Beach, FL 33472

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

	with protective c	overings no	t meeting the requirem	nents of Answer "A	", "B", or C	ation) All Glazed openings an "" or systems that appear to m			
	"A" or "B" with no documentation of compliance (Level N in the table above). □ N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist								
			iazed openings ciassin the table above	ied as Level D in ti	ne table abo	ove, and no Non-Glazed open	ings		
				rified as Level V ir	the table a	ahove			
<u> </u>	X. None or Some	e Glazed Op	enings One or more G	lazed openings cla	ssified and	Level X in the table above.			
					•	UALIFIED INSPECTO uals who may sign this fo			
Qualifie	ed Inspector Name:	, 11(2), 11	License		1 11141 / 144	License or Certificate #:			
Nos	landy Gonzalez			me Inspector		Hi12494			
	on Company: th Florida Inspecto	rs			Phone: 786 -	-218-2844			
<u>Qua</u>	<u>llified Inspector</u>	· - I hold a	n active license as	a: (check one)					
~			ection 468.8314, Florida S etion Industry Licensing E			atutory number of hours of hurricency exam.	ane mitigation		
			under Section 468.607, Fl						
	-		ontractor licensed under Se		da Statutes.				
	•		der Section 471.015, Flor						
			der Section 481.213, Flor						
			ognized by the insurer as ion 627.711(2), Florida S		sary qualifica	ations to properly complete a unif	orm mitigation		
Indiv	iduals other than	licensed co	ntractors licensed und	er Section 489.11	1, Florida S	Statutes, or professional eng	ineer		
I, <u>N</u>	oslandy Gonzalez (print name)	am a quali	•	ersonally perforn	ned the insp z) perform	pection or (<i>licensed contract</i> m the inspection and I agree			
be re	sponsible for his/h	er work.							
Qual	ified Inspector Sig	nature:	Noslandy Gonzalez	Date:	02/1	8/2023			
form the a Inspe	<u>is subject to inves ppropriate licensi</u>	<u>tigation by</u> ng agency o this form sl	the Florida Division of the criminal prosecu all be directly liable	of Insurance Fraution. (Section 627	<u>d and may</u> .711(4)-(7),	or fraudulent mitigation ver be subject to administrative Florida Statutes) The Quali yees as if the authorized miti	action by ified		
Hom	eowner to comple	te: I certify t	hat the named Qualific	ed Inspector or his	or her emp	loyee did perform an inspecti	on of the		
						my Authorized Representativ			
			D			J			
~-9				<u> </u>					
obtai	n or receive a disc	count on an		o which the indivi		ation verification form with ity is not entitled commits a	the intent to		
	definitions on this are as offering pro			s only and cannot	be used to	certify any product or consti	ruction		
Insp	ectors Initials	NG	Property Address	8042 Aberde	een Dr, Boy	nton Beach, FL 33472			
	is verification form curacies found on		up to five (5) years p	provided no materi	al changes	have been made to the struct	ure or		


Page 4 of 8

Photos



Inspectors Initials NG Property Address 8042 Aberdeen Dr, Boynton Beach, FL 33472

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

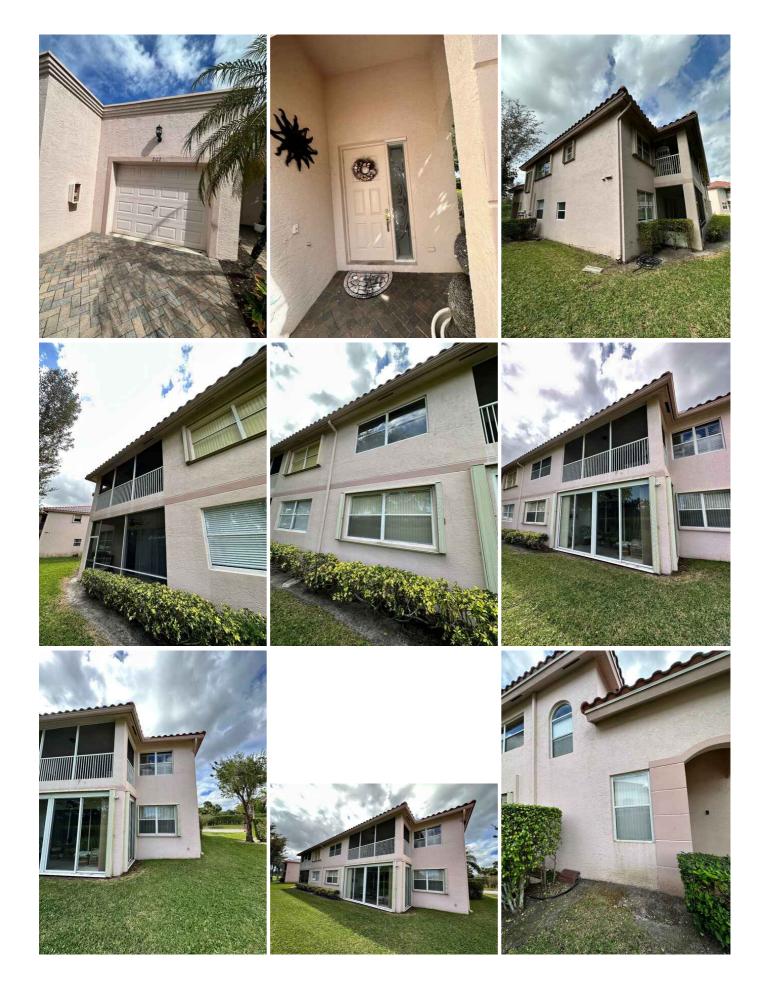

Inspectors Initials NG Property Address 8042 Aberdeen Dr, Boynton Beach, FL 33472

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.



















 Inspectors Initials
 NG
 Property Address
 8042 Aberdeen Dr, Boynton Beach, FL 33472



Additional Information

Inspectors Initials	NG	Property Address	8042 Aberdeen Dr, Boynton Beach, FL 33472
---------------------	----	------------------	---